



गुलरिया नगरपालिका
GULARIYA MUNICIPALITY



नगर कार्यपालिकाको कार्यालय
OFFICE OF THE MUNICIPAL EXECUTIVE

(Google Plus Code 683V+9FJ, Bhansar)

गुलरिया, बर्दिया, लुम्बिनी प्रदेश
Gulariya, Bardiya, Lumbini Province

लुम्बिनीप्रदेश, नेपाल
Lumbini Province, Nepal

प.सं.: २०८२।०८३ (कृषि विकास शाखा)

च.नं. ३१०४

मिति २०८३/०३/०१

श्री सरोकारवाला सबै

विषय:- दररेट पेश गर्ने बारे सार्वजनिक सूचना सम्बन्धमा ।

उपरोक्त सम्बन्धमा, आ.व. २०८२/८३ को वार्षिक बजेट तथा कार्यक्रम अन्तर्गत गुलरिया नगरपालिकामा "कृषि यन्त्र खरिद तथा वितरण (५०% लागत सहभागिता)" अनुदान कार्यक्रम सञ्चालन गर्नुपर्ने भएको हुँदा तपसिलमा उल्लेखित स्पेसिफिकेशन अनुसारका सामग्रीहरूको लागत अनुमान निर्माण प्रयोजनार्थ इच्छुक व्यवसायी/फर्म/सप्लायर्सहरूले यो सूचना प्रकाशित भएको मितिले ३ (तिन) दिनभित्र यस कार्यालयमा दररेट पेश गरी उपलब्ध गराइदिनुहुन सम्बन्धित सबैको जानकारीका लागि यो सूचना प्रकाशित गरिएको छ।

तपसिल:

कृष्ण प्रसाद जैसी

प्रमुख प्रशासकिय अधिकृत
कृष्ण प्रसाद जैसी
प्रमुख प्रशासकिय अधिकृत



गुलरिया नगरपालिका
GULARIYA MUNICIPALITY

नगर कार्यपालिकाको कार्यालय
OFFICE OF THE MUNICIPAL EXECUTIVE

(Google Plus Code 683V+9FJ, Bhansar

गुलरिया, बर्दिया
गुलरिया, बर्दिया
लुम्बिनी प्रदेश, गुलरिया, Bardiya

लुम्बिनीप्रदेश, नेपाल
Lumbini Province, Nepal

Technical Specifications

| S.N. | Items | Descriptions | Bidder's Offer | Compliance |
|------|-----------|--|--|------------|
| 1. | Rotavator | <ul style="list-style-type: none">- Suitability of work: Designed to work on wet & dry fields and any texture of soil- Mounting: CAT-II 3-point linkage, 45 – 50 HP tractor- Drive: 540 RPM or manufacturer standard, PTO-driven- Dimension: Overall width of 6 ft, working width of min. 1750 mm- Rotor assembly: Heavy-duty- Blades: Min. 42 nos., C / L / J type, High-carbon / boron steel- Side transmission type: Multi-speed gear drive- Driveline safety device: Shear bolt / slip clutch- Depth control mechanism: Arc shaped skid on both sides- Construction: Robust construction, painted, high resistance to corrosion- Weight: Min. 420 Kg | Brand: Model: Mfg. Year: Country of origin: | |
| 2. | Rotavator | <ul style="list-style-type: none">- Suitability of work: Designed to work on wet & dry fields and any texture of soil- Mounting: CAT-II 3-point linkage, 45 – 55 HP tractor- Drive: 540 RPM or manufacturer standard, PTO-driven- Dimension: Overall width of 7ft, working width of min. 2000 mm- Rotor assembly: Heavy-duty- Blades: Min. 48 nos., C / L / J type, High-carbon / boron steel- Side transmission type: Multi-speed gear drive- Driveline safety device: Shear bolt / slip clutch- Depth control mechanism: Arc shaped skid on both sides- Construction: Robust construction, painted, high resistance to corrosion- Weight: Min. 450 Kg | Brand: Model: Mfg. Year: Country of origin: | |



सम्बद्ध र संरक्षण हाम्रो प्रतिबद्धता हाम्रो अभियान"
गुलरिया नगरपालिका
GULARIYA MUNICIPALITY
नगर कार्यपालिकाको कार्यालय
OFFICE OF THE MUNICIPAL EXECUTIVE



(Google Plus Code 683V+9FJ, Bhansar

गुलरिया, बर्दिया
Gulariya, Bardiya

लुम्बिनी प्रदेश, नेपाल
Lumbini Province, Nepal

| | | | | |
|----|-------------|--|--|--|
| 3. | Disc Harrow | <ul style="list-style-type: none">- Mounting: CAT-II 3-point linkage, tractor mounted.- Type of disc: Front notched & rear plain- Gang angle: Adjustable type- Disc: 14 nos., diameter – min. 550 mm, high carbon / boron steel- Frame: Heavy-duty steel frame- Spool: Heavy-duty CI- Construction: Robust construction, painted, high resistance to corrosion- Weight: Min. 400 Kg | Brand: Model: Mfg. Year: Country of origin: | |
|----|-------------|--|--|--|

Technical Specifications

| S.N. | Items | Descriptions | Bidder's Offer | Compliance |
|------|-------------|---|--|------------|
| 4. | Disc Harrow | <ul style="list-style-type: none">- Mounting: CAT-II 3-point linkage, tractor mounted- Type of disc: Front notched & rear plain- Gang angle: Adjustable type- Disc: 16 nos., diameter – min. 550 mm, high carbon / boron steel- Frame: Heavy-duty steel frame- Spool: Heavy-duty CI- Construction: Robust construction, painted, high resistance to corrosion- Weight: Min. 450 Kg | Brand: Model: Mfg. Year: Country of origin: | |
| 5. | Cultivator | <ul style="list-style-type: none">- Mounting: CAT-II 3-point linkage, tractor mounted, 40 – 50 HP Tractor- Type: Rigid- Overall width: Min. 2100 mm- Tines: Min. 9 nos.- Shovel: Reversible, High carbon steel, thickness – Min. 8 mm- Frame: Heavy-duty steel frame- Construction: Robust construction, painted, high resistance to corrosion- Weight: Min. 200 Kg | Brand: Model: Mfg. Year: Country of origin: | |

स्थायी लेखा नं. २०१३३३९४५
कार्यालय कोड नं. ८०१०५५८०१

"विकास, सम्बद्धि र संरक्षण हाम्रो प्रतिबद्धता हाम्रो अभियान"



गुलरिया नगरपालिका
GULARIYA MUNICIPALITY

नगर कार्यपालिकाको कार्यालय

OFFICE OF THE MUNICIPAL EXECUTIVE




गुलरिया, बर्दिया
Gulariya, Bardiya

लुम्बिनीप्रदेश, नेपाल
Lumbini Province, Nepal

(Google Plus Code 683V+9FJ, Bhansar)

| | | | | |
|----|--------------------|---|--|--|
| 6. | Laser land leveler | <ul style="list-style-type: none">- Mounting: CAT-II 3-point linkage- Working width: Min. 2000 mm- Scrapper thickness: Min. 8 mm- Type: Single / double acting hydraulic cylinder- Laser transmitter: Radius range of min. 650 m- Laser receiver: 360° beam receiver, LED display with high, low & on grade indication.- Controller: Automatic and manual grade control- Operation: Accuracy of max. $\pm 10\text{mm @ } 30\text{ m}$ or better, ambient temperature min. $+ 50^\circ\text{C}$ or above, devices voltage of min. 10V DC.- Tyres: 4 nos., Straight axle or Zig-zag arrangement- Frame: Heavy-duty steel frame- Cutting blade: High carbon steel- Construction: Robust construction, painted, high resistance to corrosion- Weight: Min. 750 Kg | Brand: Model: Mfg. Year: Country of origin: | |
|----|--------------------|---|--|--|



गुलरिया नगरपालिका
GULARIYA MUNICIPALITY

नगर कार्यपालिकाको कार्यालय
OFFICE OF THE MUNICIPAL EXECUTIVE



(Google Plus Code 683V+9FJ, Bhansar)

गुलरिया, बर्दिया
Gulariya, Bardiya

लुम्बिनीप्रदेश, नेपाल
Lumbini Province, Nepal

Technical Specifications

| S.N. | Items | Descriptions | Bidder's Offer | Compliance |
|------|--------------|---|--|------------|
| 7. | Straw Reaper | <ul style="list-style-type: none">- Mounting: CAT-II 3-point linkage- Drive: 540 RPM, Tractor PTO-driven- Overall width of min. 2100 mm- Thresher blades: Min. 250 nos.- Cutter no. of blades: Min. 28 nos.- No. of fingers: At least 14 nos.- Blower: High-capacity double blower system.- Gear box: Heavy duty- Construction: Robust frame and body, painted, high resistance to corrosion- Weight: Min. 1700 Kg | Brand: Model: Mfg. Year: Country of origin: | |
| 8. | Power tiller | <ul style="list-style-type: none">- Engine: Single cylinder, 4-stroke diesel engine, water cooled, ZS1115 variant.- Maximum power output: 22 HP- Cooling system: Radiator- Starter: Manual crank start- Transmission: Double friction disc, 6 forwards + 2 reverses.- Performance: Tilling width - min. 900 mm; tilling depth - min. 150 mm- Rotavator: 26 - 32 nos. blades- Brakes: Inner side expansion, wet type- Working weight: Min. 550 kg. | Brand: Model: Mfg. Year: Country of origin: | |
| 9. | MB Plough | <ul style="list-style-type: none">- Type: Hydraulic Reversible- Mounting: CAT-II 3-point linkage, tractor mounted- Depth of cut: Min. 300 mm- Tilling width: Min. 900 mm- No. of furrow: 2 x 3- Material: Heavy-duty, high carbon / boron steel mould board- Construction: Robust frame and body, painted, high resistance to corrosion- Weight: Min. 500 Kg | Brand: Model: Mfg. Year: Country of origin: | |

स्थायी लेखा नं. २०१३३३९४५


कार्यालय कोड नं. ८०१०५५८०१

"विकास, सम्बद्धि र संरक्षण हाम्रो प्रतिबद्धता हाम्रो अभियान"



गुलरिया नगरपालिका
GULARIYA MUNICIPALITY

नगर कार्यपालिकाको कार्यालय
OFFICE OF THE MUNICIPAL EXECUTIVE

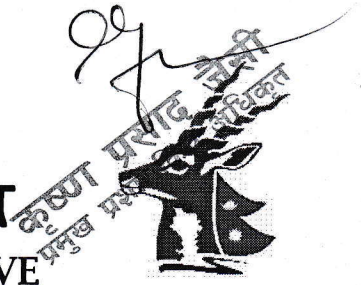

(Google Plus Code 683V+9FJ, Bhansar)

गुलरिया, बर्दिया
Gulariya, Bardiya

लुम्बिनीप्रदेश, नेपाल
Lumbini Province, Nepal

| | | | | |
|-----|-----------|---|--|--|
| 10. | MB plough | <ul style="list-style-type: none">- Type: Hydraulic Reversible- Mounting: CAT-II 3-point linkage, tractor mounted- Depth of cut: Min. 300 mm- Tilling width: Min. 600 mm- No. of furrow: 2 × 2- Material: Heavy-duty frame, high carbon / boron steel mould board- Construction: Robust frame and body, painted, high resistance to corrosion- Weight: Min. 400 Kg | Brand: Model: Mfg. Year: Country of origin: | |
|-----|-----------|---|--|--|



Technical Specifications

| S.N. | Items | Descriptions | Bidder's Offer | Compliance |
|------|--|---|--|------------|
| 11. | Maize thresher with elevator & conveyor system | <ul style="list-style-type: none">- Compatibility: 40 HP & above tractors- Type: PTO-driven & towed, elevator & conveyor system with auto lifting & feeding.- Capacity: Min. 1300 kg/hr- Type of cylinder: Stud type- Stud: Min. 80 pcs, threaded type- Rotor: Heavy-duty, in-line type- Elevator: Chain type, length of min. 1950 mm- Dimensions: Overall length of min. 3000 mm.- Cleaning system: Blower with sieves- Construction: Robust frame and body, painted, high resistance to corrosion- Weight: Min. 1200 kg | Brand: Model: Mfg. Year: Country of origin: | |
| 12. | Services | <ul style="list-style-type: none">- Service: After service sales support & parts providing arrangement at local region.- Accessories: Standard accessories, toolkit, PTO shaft wherever applicable- Warranty: Min. 1 year- Instruction & Manual: Owner / operator copy written in English / Nepali.- Delivery: Equipment / machinery shall be delivered to the office yard. | | |